
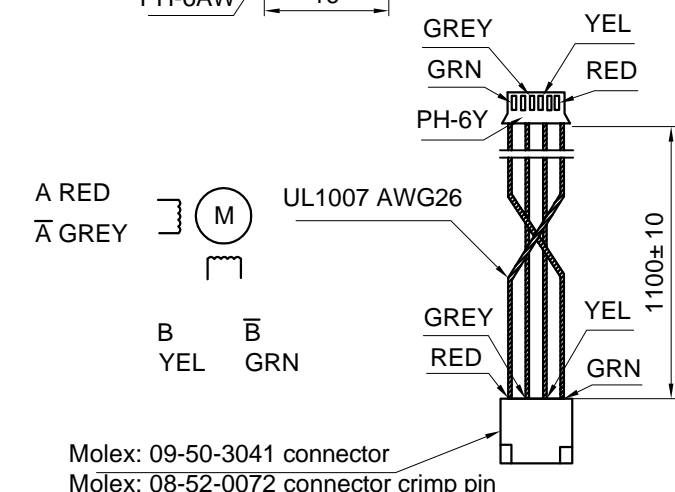
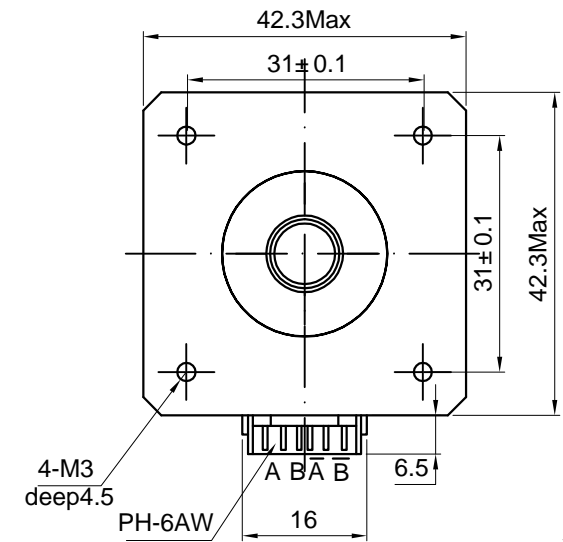


NO.	ITEM	SPECIFICATION
1	Rated Voltage	12V
2	NO. of Phase	2
3	Step Angle	1.8° ± 5%
4	Resistance Per Phase	30Ω ± 10%
5	Inductance Per Phase	37mH ± 20%
6	Current Per Phase	0.4A
7	Holding Torque	260mN.m
8	Insulation Class	Class B
9	Insulation Resistance	100Mohm(500VDC)
10	Operation Temp Range	-10 ~ +40° C
11	Detent Torque	12mN.m
12	Rotor Inertia	38g.cm <sup>2</sup>
13	Stepping Accuracy	± 5%
14	Life	
15	Lead Wire	UL1007 AWG26
16	MFG of Terminal	Molex
17	Weight	0.22Kg

Part-P :

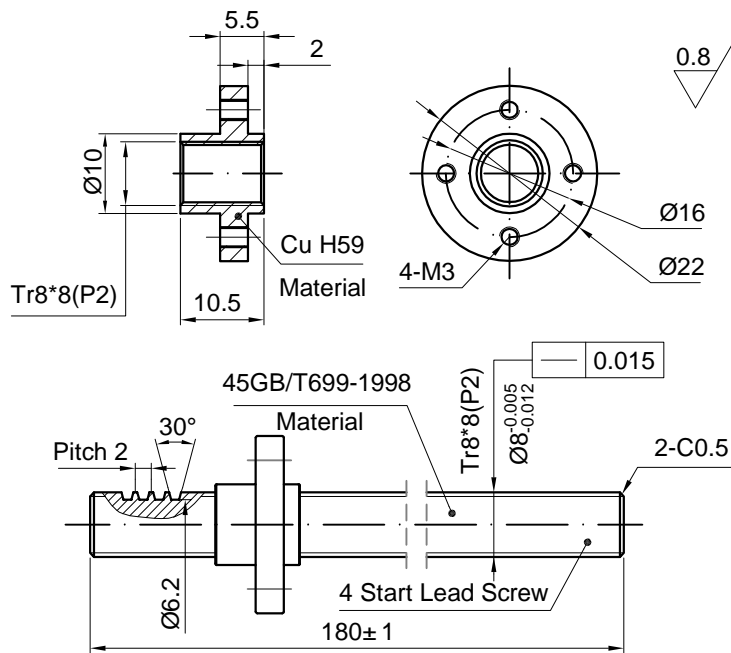

DRAWN	Gordon	1/20/2011	UNIT: mm		
CHECKED	Sara	1/20/2011	Kysan Electronics		
ENG APPR.			Kysan SKU 1040103		
MFG APPR.			REV 01		
Q.A.			SCALE: 1.5:1 Weight(kg): 0.22 SHEET 1 OF 1		
17HD-8X150MM0.4A			SIZE A4	Kysan SKU 1040103	REV 01