
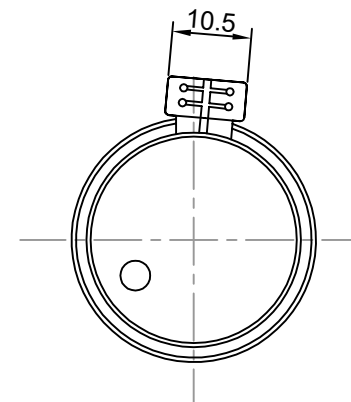
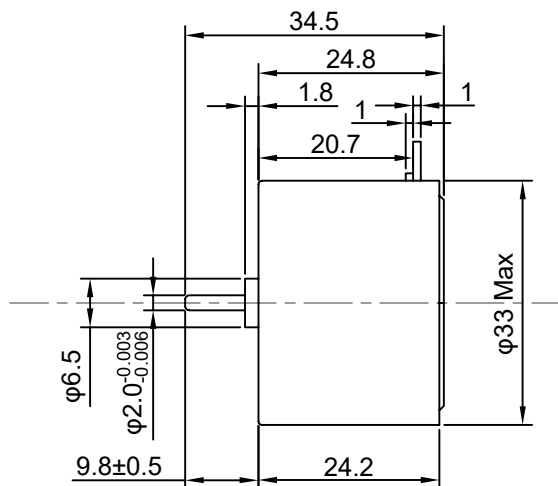


Direction of Rotation

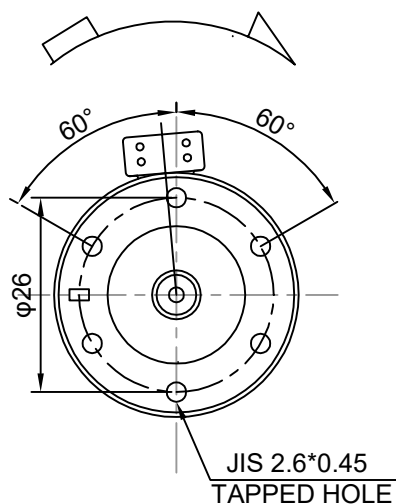

Notes:

- 1, Usable machine screw length 2.5mm max, from motor mounting surface.
- 2, Allowable torque for screwing of tapped hole: 2.5kgf-cm max.
- 3, Tolerances not otherwise specified decimal: ±0.3mm.

No.	Item	Specification	No.	Item	Specification
1	Rated Voltage	12V DC	7	Starting Voltage	4.0V Max
2	Voltage Range	3.4~15.6V DC	8	Stall Torque	70g-cm Min
3	No Load Current	30mA Max	9	Shaft end play	0.05-0.5mm
4	No Load Speed	2450±5%RPM	10	Rated Load	10g-cm
5	Rated Load Current	120mA Max	11	Adjustable Speed Range	1900-2700RPM
6	Rated Load Speed	2400±5%RPM			

Drawn	Tony	12/10/2025	Unit: mm		
Checked	Eva	12/10/2025	Kysan Electronics www.kysanelectronics.com		
Eng Appr.					
Mfg Appr.					
Q.A.					
SKU:			Siae: A4	Weight(Kg):	
1112073			Scale		