


8 7 6 5 4 3 2 1

D


C

B

A

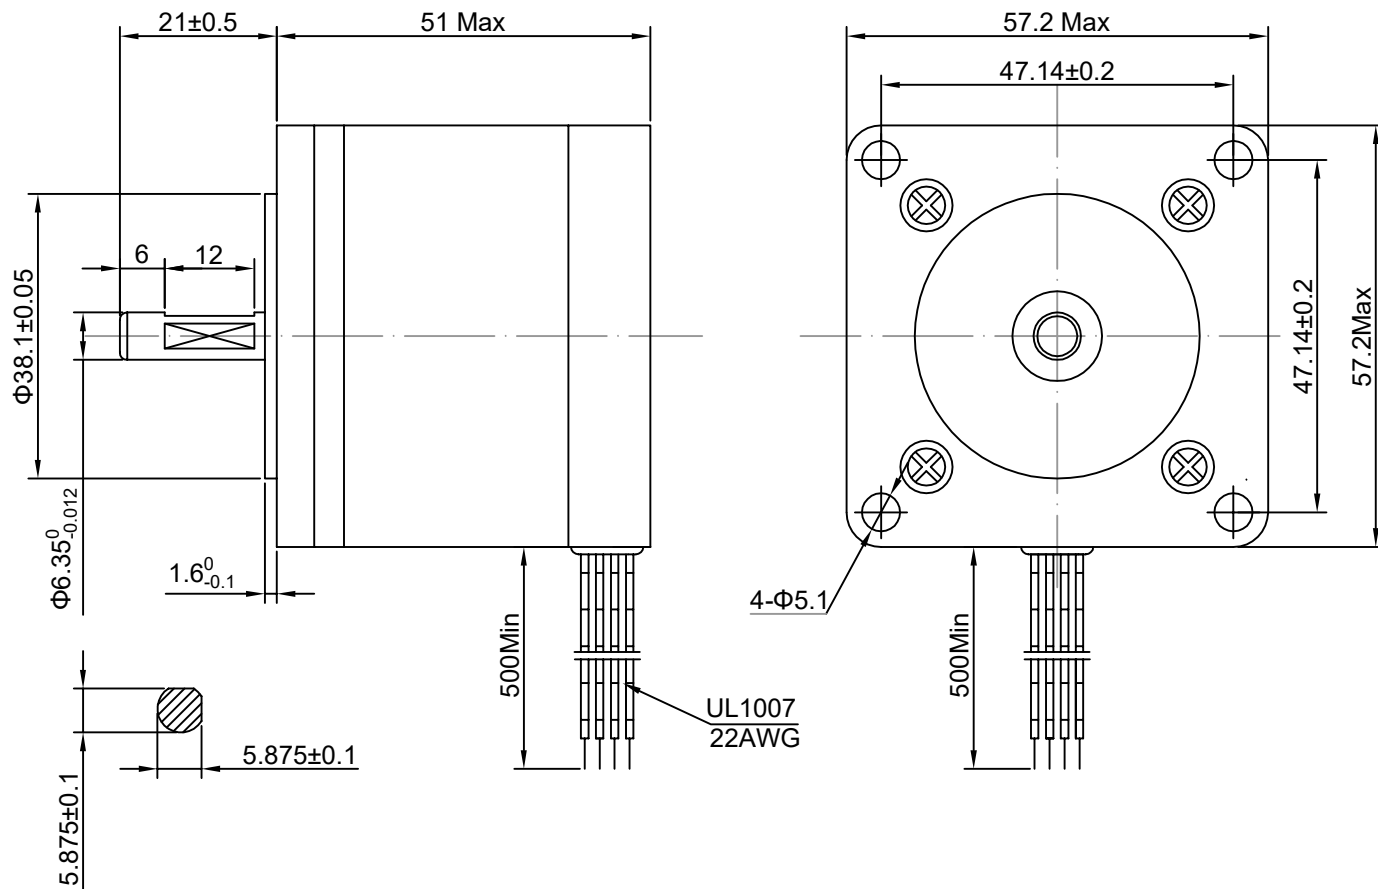

Wiring Diagram



Exiting Sequence (2 Phase)

Step	A	B	$\bar{A}$	$\bar{B}$	CCW
1	+	+	-	-	
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

CW (Clockwise) and CCW (Counter Clockwise) directions are indicated.

No.	Item	Specification	No.	Item	Specification
1	Rated Voltage	2.6V DC	7	Holding Torque	6kg.cm
2	Step Angle	1.8°±5%	8	Insulation Resistance	100MΩ (500VDC)
3	Number of Phase	2	9	Insulation Class	B
4	Phase Current	2A	10		
5	Phase Inductance	3.5mH±20%			
6	Phase Resistance	1.3Ω±10%			

Drawn	Tony	12/17/2025	Unit: mm		
Checked	Eva	12/17/2025	Kysan Electronics www.kysanelectronics.com		
Eng Appr.					
Mfg Appr.					
Q.A.					
SKU:			Siae: A4	Weight(Kg):	
1125090			Scale		

8 7 6 5 4 3 2 1