


5K $\Phi 5.2 \times 20$ RoHS Compliant



玻璃保险丝管(延时型)

Glass Tube Fuse (Time-Lag) 250V

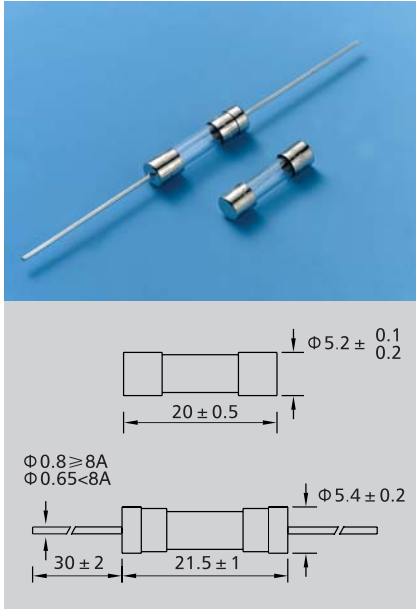


目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 ² T Melting Integral (A ² .S)
5K0200A	200mA	250V	1500	0.1
5K0250A	250mA	250V	1300	0.18
5K0315A	315mA	250V	1100	0.3
5K0400A	400mA	250V	1000	0.65
5K0500A	500mA	250V	900	0.85
5K0630A	630mA	250V	300	1.6
5K0800A	800mA	250V	250	2.3
5K1100A	1A	250V	150	3.5
5K1125A	1.25A	250V	150	4.3
5K1160A	1.6A	250V	150	7.2
5K1200A	2A	250V	150	10
5K1250A	2.5A	250V	120	22
5K1315A	3.15A	250V	100	39
5K1400A	4A	250V	100	54
5K1500A	5A	250V	100	115
5K1630A	6.3A	250V	100	200
5K1800A	8A	250V	100	320
5K2100A	10A	250V	100	510
5K2125A	12.5A	250V	80	800
5K2160A	16A	250V	80	1105

带引线产品目录编号后加 "P"

Suffix "P" for Lead Type After Catalog No.

Time-Current Characteristics
电流-时间曲线图

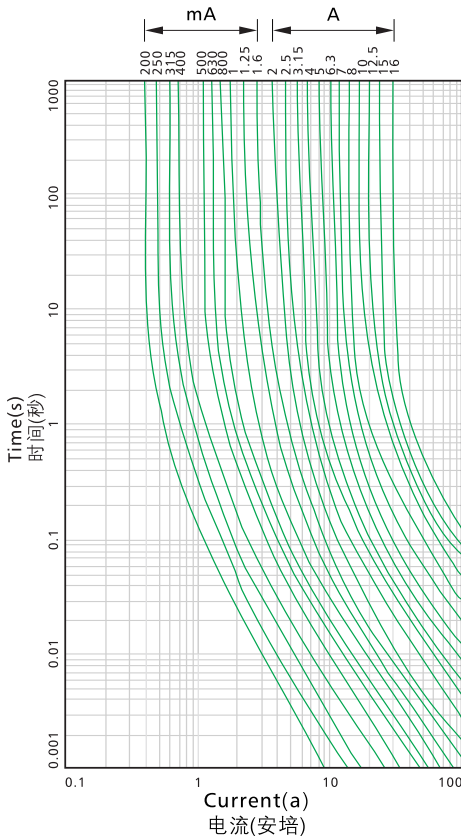

认证 Approvals	电流范围 Ampere Range	证书号 Certificate No.
cRUUS	200mA~15A	E221465
D'E	315mA~10A	40010746
CCC	315mA~6.3A	2004010207109463
CQC	8A~16A	CQC06012018222
PS E JET	1A~5A	JET5359-31003-2001
PS E JET	6.3A~15A	JET5359-31003-2002
K	315mA~800mA	SU05026-7004A
K	1A~2.5A	SU05026-7005A
K	3.15A~6.3A	SU05026-7006B
S	315mA~6.3A	1019591

额定分断能力:

Interrupting Rating:

35A or 10In Whichever is greater

测试标准:

Testing Standard: IEC60127-2 GB9364-2

电气特性 Electrical Characteristics:

额定电流的% % of Ampere Rating	熔断时间 Opening Time (200mA~10A)	熔断时间 Opening Time (12.5A~16A)
210%	2 min Max(小于2分钟)	5 min Max(小于5分钟)
275%	600 ms~10 s	600 ms~15 s
400%	150 ms~3 s	150 ms~5 s
1000%	20 ms~300 ms	20 ms~400 ms