


No.	Item	Specification	No.	Item	Specification
1	Rated Voltage	24V DC	7	Rated Load	85g-cm
2	Voltage range	22-26V DC	8	Stall Current	2.4A Max
3	No Load Current	0.13A Max	9	Starting Torque	450g-cm
4	No Load Speed	8500±10%RPM	10		
5	Rated Load Current	0.5A Max			
6	Rated Load Speed	6880±10%RPM			

Drawn	Tony	05/19/2026	Unit: mm		
Checked	Eva	05/19/2026	Kysan Electronics www.kysanelectronics.com		
Eng Appr.					
Mfg Appr.					
Q.A.					
SKU: 1112048			Siae: A4	Weight(Kg):	
			Scale		

A

A

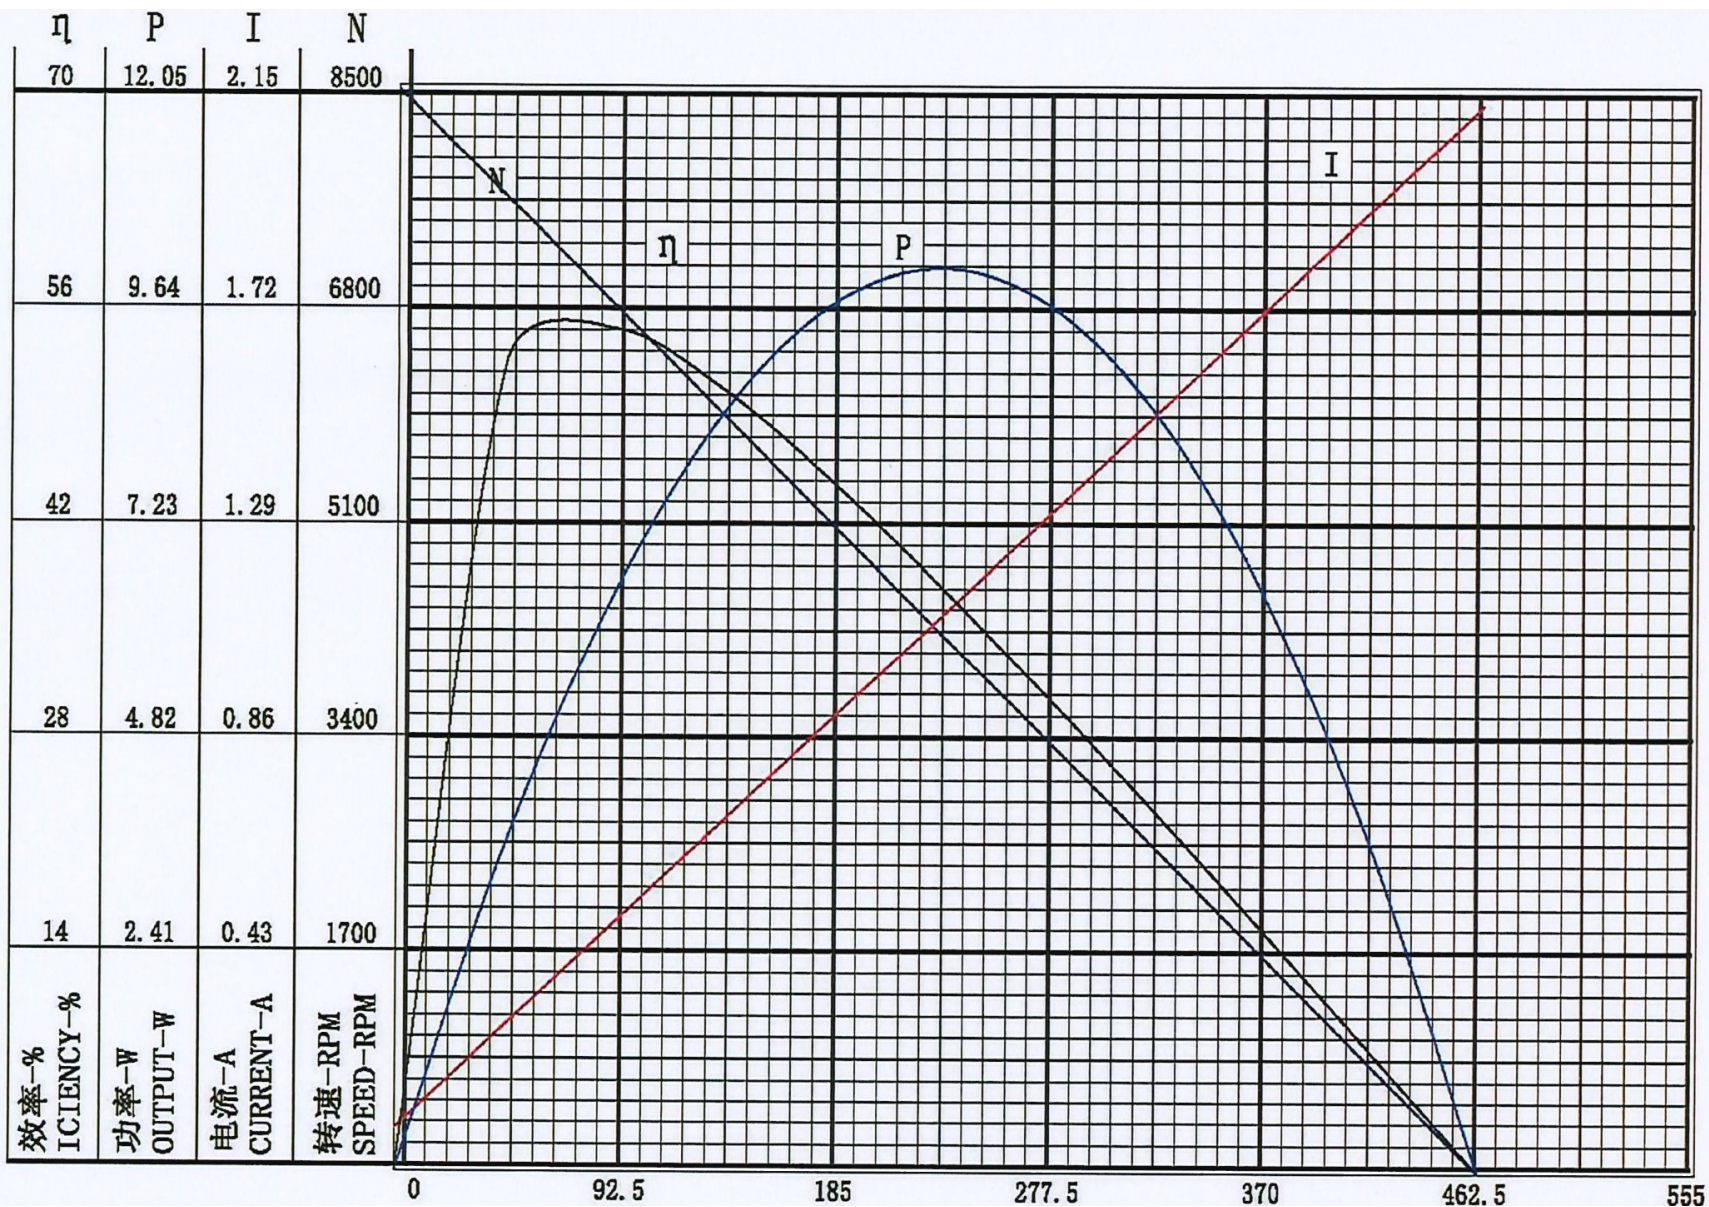

性能PERFORMANECE

無負荷點AT NO LOAD

轉速SPEED = 8466 RPM

電流CURRENT = 0.084 AMP

堵轉點AT STALL EXTRAPOLATION

力矩TORQUE = 462.000 G. CM

電流CURRENT = 2.110 AMP

最大效率點AT MAXIMUM EFFICIENCY

效率EFFICIENCY = 55.008 %

轉速SPEED = 7027 RPM

力矩TORQUE = 78.540 G. CM

電流CURRENT = 0.429 AMP

功率OUTPUT = 5.660 WATTS

最大輸出功率點AT MAXIMUM OUTPUT

效率EFFICIENCY = 38.085 %

轉速SPEED = 4233 RPM

力矩TORQUE = 231.000 G. CM

電流CURRENT = 1.097 AMP

功率OUTPUT = 10.029 WATTS